


TRÓJNIK
SOCKET WELD

3000 lbs • 6000 lbs • 9000 lbs

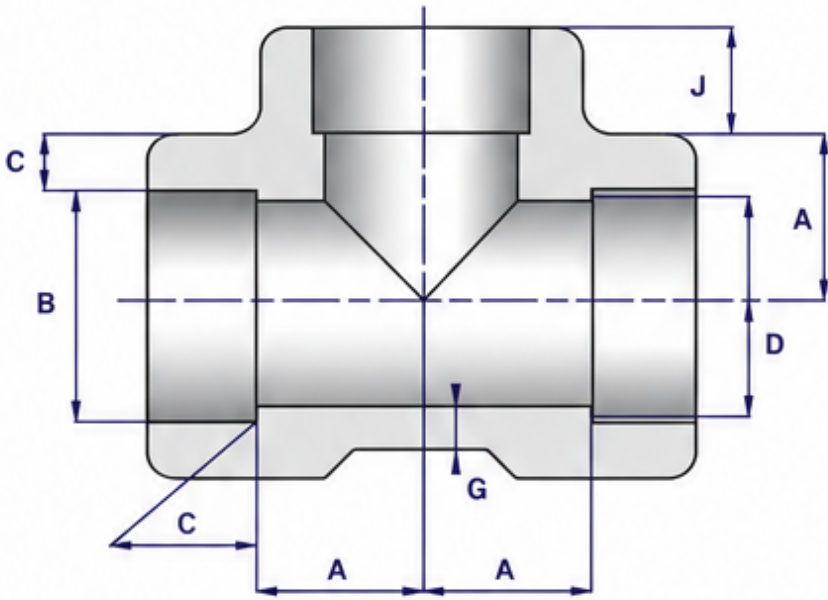

3000 lbs

SIZE	B		D		C*		G	J	A	A	Peso Kg./Cad. Weight Kg./Each
	Min.	Max.	Min.	Max.	Min.	Avg.	Min.	Min.	Min.	Tolerance ± Toleranz ±	
¼"	10.8	11.2	6.1	7.6	3.18	3.18	2.41	9.5	11.0	1.0	0.165
⅜"	14.2	14.6	8.5	10.0	3.30	3.78	3.02	9.5	11.0	1.0	0.165
½"	17.6	18.0	11.8	13.3	3.50	4.01	3.20	9.5	13.5	1.5	0.190
¾"	21.8	22.2	15.0	16.6	4.09	4.87	3.73	9.5	15.5	1.5	0.360
1"	27.2	27.6	20.2	21.7	4.27	4.90	3.91	12.5	19.0	1.5	0.490
1 ¼"	33.9	34.3	25.9	27.4	4.98	5.69	4.55	12.5	22.5	2.0	0.715
1 ½"	42.7	43.1	34.3	35.8	5.28	6.07	4.85	12.5	27.0	2.0	1.010
2"	48.8	49.2	40.1	41.6	5.54	6.35	5.08	12.5	32.0	2.0	1.385
2 ½"	73.9	74.4	61.2	64.2	7.67	8.76	7.01	16.0	41.0	2.5	3.900
3"	89.8	90.3	76.4	79.4	8.30	9.52	7.62	16.0	57.0	2.5	6.300
4"	115.2	115.7	100.7	103.8	9.35	10.69	8.58	19.0	66.5	2.5	10.400

6000 lbs

SIZE	B		D		C*		G	J	A	A	Peso Kg./Cad. Weight Kg./Each
	Min.	Max.	Min.	Max.	Min.	Avg.	Min.	Min.	Min.	Tolerance ± Toleranz ±	
¼"	10.8	11.2	3.2	4.8	3.43	3.96	3.15	9.5	11.0	1.0	0.180
⅜"	14.2	14.6	5.6	7.1	4.01	4.80	3.68	9.5	11.0	1.0	0.230
½"	17.6	18.0	8.4	9.9	4.37	5.03	4.01	9.5	15.5	1.5	0.450
¾"	21.8	22.2	11.0	12.5	5.18	5.97	4.78	9.5	19.0	1.5	0.520
1"	27.2	27.6	14.8	16.3	6.04	6.96	5.56	12.5	22.5	1.5	0.850
1 ¼"	33.9	34.3	19.9	21.5	6.93	7.92	6.35	12.5	27.0	2.0	1.250
1 ½"	42.7	43.1	28.7	30.2	6.93	7.92	6.35	12.5	32.0	2.0	1.750
2"	48.8	49.2	33.2	34.7	7.80	7.80	7.14	12.5	41.0	2.0	2.750

9000 lbs

SIZE	B		D		C*		G	J	A	A	Peso Kg./Cad. Weight Kg./Each
	Min.	Max.	Min.	Max.	Min.	Avg.	Min.	Min.	Min.	Tolerance ± Toleranz ±	
¼"	21.8	22.2	5.6	7.2	8.18	9.35	7.47	9.5	25.5	1.5	1.010
⅜"	27.2	27.6	10.3	11.8	8.58	9.78	7.82	12.5	28.5	2.6	1.500
½"	33.9	34.3	14.4	16.0	9.96	11.38	9.09	12.5	32.0	2.0	2.250
¾"	42.7	43.1	22.0	23.5	10.62	12.14	9.70	12.5	38.0	2.0	3.150
1"	48.8	49.2	27.2	28.7	11.12	12.70	10.15	12.5	41.0	2.0	3.650
1 ¼"	61.2	61.7	37.4	38.9	12.12	13.84	11.07	16.0	38.0	2.0	8.200
1 ½"	73.9	74.4	46.8	48.2	14.45	15.51	13.21	16.0	57.0	2.5	11.300
2"	89.8	90.3	56.0	57.7	16.66	19.05	15.24	19.0	66.5	2.5	18.000



UWAGA:

- Wymiary w milimetrach
- Wymiary zgodne z normą ANSI B 16.11
- Wagi orientacyjne

* I valore dello spessore C non deve essere inferiore al valore della colonna Avg. Il valore Min. è consentito solo in aree localizzate.

* Average of socket wall thickness around periphery shall not be less than listed values. The minimum values are permitted in localized areas.

ATTENTION:

- Dimensions are in millimeters
- Dimensions in compliance with ANSI B 16.11
- Weights are approximate