

MUFA SOCKET WELD SOCKET WELD COUPLING


DOSTĘPNE KLASY / AVAILABLE CLASSES:

• 3000 lbs • 6000 lbs • 9000 lbs

DOSTĘPNE MATERIAŁY /

AVAILABLE MATERIALS:

• A105 • A350 LF2
• 304L • 316L

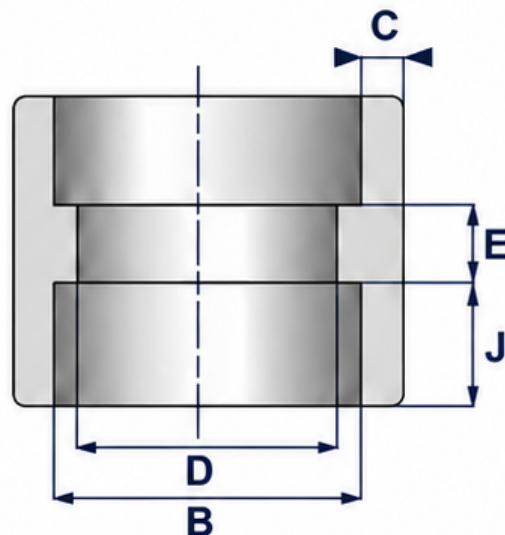

Klasa 3000 lbs / Class 3000 lbs

Rozmiar Size	B min. (mm)	B maks. (mm)	D min. (mm)	D maks. (mm)	C*		J min. (mm)	E min. (mm)	E Tolerancje ± (mm)	Masa kg/szt. Weight kg/each
1/8"	10.8	11.2	6.1	7.6	min. (mm)	avg. (mm)	9.5	6.5	1.5	0.055
1/4"	14.2	14.6	8.5	10.0	3.30	3.78	9.5	6.5	1.5	0.060
3/8"	17.6	18.0	11.8	13.3	3.50	4.01	9.5	6.5	3.0	0.085
1/2"	21.8	22.2	15.0	16.6	4.09	4.67	9.5	9.5	3.0	0.150
3/4"	27.2	27.6	20.2	21.7	4.27	4.90	12.5	9.5	3.0	0.210
1"	33.9	34.3	25.9	27.4	4.98	5.69	12.5	12.5	4.0	0.350
1 1/4"	42.7	43.1	34.3	35.8	5.28	6.07	12.5	12.5	4.0	0.475
1 1/2"	48.8	49.2	40.1	41.6	5.54	6.35	12.5	12.5	4.0	0.620
2"	61.2	61.7	51.7	53.3	6.04	6.93	16.0	19.0	4.0	1.050
2 1/2"	73.9	74.4	61.2	64.2	7.67	8.76	16.0	19.0	5.0	1.650
3"	89.8	90.3	76.4	79.4	8.30	9.52	16.0	19.0	5.0	2.200
4"	115.2	115.7	100.7	103.8	9.35	10.69	19.0	19.0	5.0	3.400

Klasa 6000 lbs / Class 6000 lbs

Rozmiar Size	B min. (mm)	B maks. (mm)	D min. (mm)	D maks. (mm)	C*		J min. (mm)	E min. (mm)	E Tolerancje ± (mm)	Masa kg/szt. Weight kg/each
1/8"	10.8	11.2	3.2	4.8	min. (mm)	avg. (mm)	9.5	6.5	1.5	0.060
1/4"	14.2	14.6	5.6	7.1	4.01	4.60	9.5	6.5	1.5	0.075
3/8"	17.6	18.0	8.4	9.9	4.37	5.03	9.5	6.5	3.0	0.110
1/2"	21.8	22.2	11.0	12.5	5.18	5.97	9.5	9.5	3.0	0.200
3/4"	27.2	27.6	14.8	16.3	6.04	6.96	12.5	9.5	3.0	0.310
1"	33.9	34.3	19.9	21.5	6.93	7.92	12.5	12.5	4.0	0.500
1 1/4"	42.7	43.1	28.7	30.2	6.93	7.92	12.5	12.5	4.0	0.660
1 1/2"	48.8	49.2	33.2	34.7	7.80	8.92	12.5	12.5	4.0	0.890
2"	61.2	61.7	42.1	43.6	9.50	10.92	16.0	19.0	4.0	1.700

Klasa 9000 lbs / Class 9000 lbs

Rozmiar Size	B min. (mm)	B maks. (mm)	D min. (mm)	D maks. (mm)	C*		J min. (mm)	E min. (mm)	E Tolerancje ± (mm)	Masa kg/szt. Weight kg/each
1/2"	21.8	22.2	5.6	7.2	min. (mm)	avg. (mm)	9.5	9.5	3.0	0.335
3/4"	27.2	27.6	10.3	11.8	8.56	9.78	12.5	9.5	3.0	0.440
1"	33.9	34.3	14.4	16.0	9.96	11.38	12.5	12.5	4.0	0.750
1 1/4"	42.7	43.1	22.0	23.5	10.62	12.14	12.5	12.5	4.0	1.040
1 1/2"	48.8	49.2	27.2	28.7	11.12	12.70	12.5	12.5	4.0	1.300
2"	61.2	61.7	37.4	38.9	12.12	13.84	16.0	19.0	4.0	2.200

UWAGA:

- Wymiary w milimetrach.
- Wagi orientacyjne.

NOTE:

- Dimensions are in millimeters.
- Weights are approximate.



Produkty spełniają
wymagania normy
Products meet the requirements of
BS 3799