
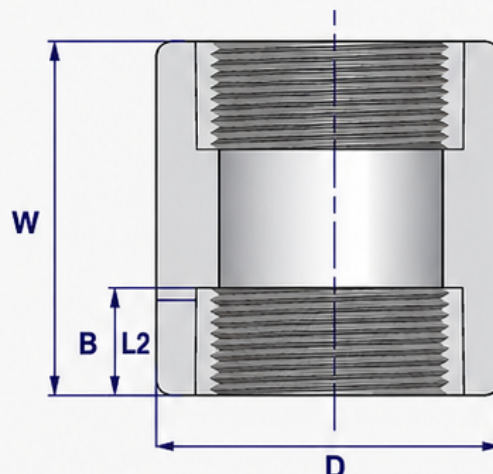


MUFA GWINTOWANA

DOSTĘPNE WYKONANIE:

- Stal węglowa
- Stal nierdzewna

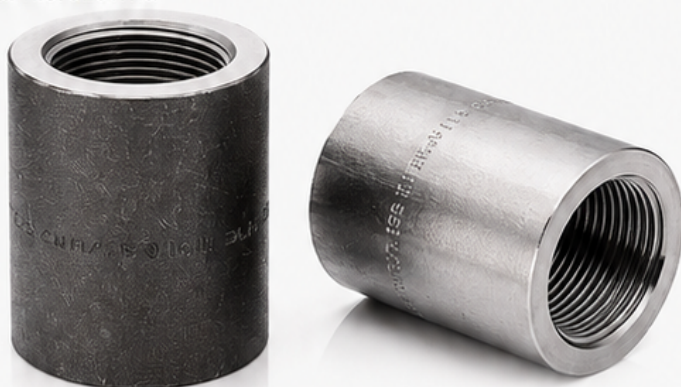

DOSTĘPNE WYKONANIE:

- Stal węglowa
- Stal nierdzewna



DOSTĘPNE GWINTY:

- BSP
- NPT
- BSPT
- Rp
- Rc
- G

3000 lbs

SIZE	W	D min.	B min.	L2 min.	Masa kg/szt., Weight Kilos/Each
1/8"	32	16	6.4	6.7	0.060
1/4"	35	19	8.1	10.2	0.070
3/8"	38	22	9.1	10.4	0.080
1/2"	48	28	10.9	13.6	0.170
3/4"	51	35	12.7	13.9	0.230
1"	60	44	14.7	17.3	0.460
1 1/4"	67	57	17.0	18.0	0.800
1 1/2"	79	64	17.8	18.4	1.110
2"	86	76	19.0	19.2	1.500
2 1/2"	92	92	23.6	28.9	2.300
3"	108	108	25.9	30.5	3.500
4"	121	140	27.7	33.0	6.000

6000 lbs

SIZE	W	D min.	B min.	L2 min.	Masa kg/szt., Weight Kilos/Each
1/8"	32	22	6.4	6.7	0.100
1/4"	35	25	8.1	10.2	0.120
3/8"	38	32	9.1	10.4	0.210
1/2"	48	38	10.9	13.6	0.350
3/4"	51	44	12.7	13.9	0.490
1"	60	57	14.7	17.3	1.080
1 1/4"	67	64	17.0	18.0	1.160
1 1/2"	79	76	17.8	18.4	1.960
2"	86	92	19.0	19.2	2.940
2 1/2"	92	108	23.6	28.9	4.200
3"	108	127	25.9	30.5	6.300
4"	121	159	27.7	33.0	10.400

UWAGA:

- Wymiary w milimetrach
- Wymiary zgodne z normą ANSI B 16.11
- Ilości są orientacyjne

REMARKS:

- Dimensions are in millimeters
- Dimensions in accordance with ANSI B 16.11
- Weights are approximate



Produkty spełniają
wymagania normy

BS 3799