


NYPEL GWINTOWANY REDUKCYJNY

DOSTĘPNE WYKONANIE:

- Stal węglowa
- Stal nierdzewna

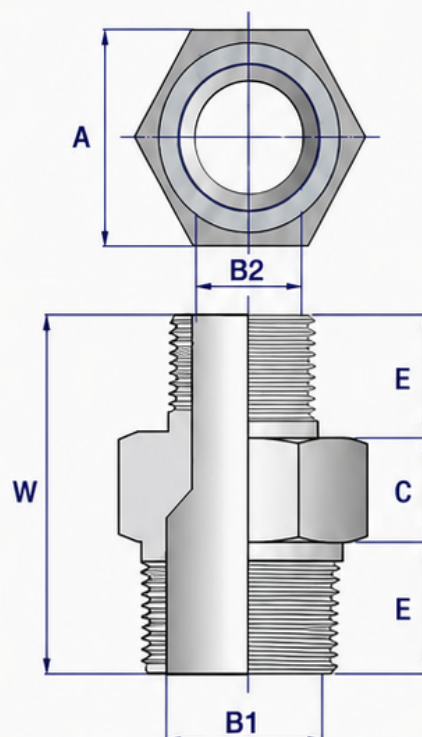

DOSTĘPNE WYKONANIE:

- Stal węglowa
- Stal nierdzewna



DOSTĘPNE GWINTY:

- BSP
- NPT
- BSPT
- Rp
- Rc
- G

SIZE A × B	3000 lbs B1 B2		6000 lbs B1 B2		A Min.	W Min.	C Min.	E Min.	3000 lbs Peso Kg./Cad. Weight Kilos/Each	6000 lbs Peso Kg./Cad. Weight Kilos/Each
3/8" × 1/4"	11	8	8	6	19	40	8	16	0.045	0.050
1/2" × 1/4"	14	8	11	6	22	48	8	20	0.060	0.075
1/2" × 3/8"	14	11	11	8	22	48	8	20	0.060	0.080
3/4" × 3/8"	19	11	13	8	27	52	10	21	0.090	0.125
3/4" × 1/2"	19	14	13	11	27	52	10	21	0.100	0.145
1" × 1/2"	24	14	17	11	35	60	10	25	0.160	0.230
1" × 3/4"	24	19	17	13	35	60	10	25	0.165	0.250
1 1/4" × 1/2"	32	14	22	11	46	66	14	26	0.265	0.370
1 1/4" × 3/4"	32	19	22	13	46	66	14	26	0.270	0.385
1 1/4" × 1"	32	24	22	17	46	66	14	26	0.285	0.420
1 1/2" × 1/2"	38	14	30	11	50	68	16	26	0.335	0.545
1 1/2" × 3/4"	38	19	30	13	50	68	16	26	0.340	0.540
1 1/2" × 1"	38	24	30	17	50	68	16	26	0.350	0.480
1 1/2" × 1 1/4"	38	32	30	22	50	68	16	26	0.350	0.460
2" × 1/2"	49	14	39	11	62	71	17	27	0.510	0.700
2" × 3/4"	49	19	39	13	62	71	17	27	0.515	0.720
2" × 1"	49	24	39	17	62	71	17	27	0.525	0.760
2" × 1 1/4"	49	32	39	22	62	71	17	27	0.525	0.800
2" × 1 1/2"	49	38	39	30	62	71	17	27	0.525	0.810
2 1/2" × 1"	59	24	45	17	76	99	19	40	0.950	1.400
2 1/2" × 1 1/4"	59	32	45	22	76	99	19	40	0.950	1.350
2 1/2" × 1 1/2"	59	38	45	30	76	99	19	40	0.950	1.350
2 1/2" × 2"	59	49	45	39	76	99	19	40	0.950	1.400
3" × 1"	73.5	24	58.5	17	90	104	20	42	1.500	2.150
3" × 1 1/4"	73.5	32	58.5	22	90	104	20	42	1.500	2.150
3" × 1 1/2"	73.5	38	58.5	30	90	104	20	42	1.500	2.150
3" × 2"	73.5	49	58.5	39	90	104	20	42	1.500	2.200
3" × 2 1/2"	73.5	59	58.5	45	90	104	20	42	1.500	2.400
4" × 1"	97	24	80	17	118	114	22	46	2.400	3.900
4" × 1 1/4"	97	32	80	22	118	114	22	46	2.400	3.900
4" × 1 1/2"	97	38	80	30	118	114	22	46	2.400	3.900
4" × 2"	97	49	80	39	118	114	22	46	2.400	3.900
4" × 2 1/2"	97	59	80	45	118	114	22	46	2.400	3.900
4" × 3"	97	73.5	80	58.5	118	114	22	46	2.400	3.900

UWAGA:

- Wymiary w milimetrach
- Wymiary zgodne z normą BS 3799
- Wagi orientacyjne

REMARKS:

- Dimensions are in millimeters
- Dimensions in compliance with BS 3799
- Weights are approximate



Produkty spełniają
wymagania normy

BS 3799